


Flo Wall M



Foster+Partners, 2013



Wall lamp in varnish coated aluminium and steel for diffused directional light. The head rotates 300° to direct the 3W-LED light and the arm swivells 180° on the wall bracket. 2-step push switch positioned on the head. Transformer not included.

FINISHINGS

 Black Soft Touch 3000K - cod. 97601ST00 2700K - cod. 97601STK27	 Brushed Nickel 3000K - cod. 97644000 2700K - cod. 97644K270
 Matt White 3000K - cod. 97602OP00 2700K - cod. 97602OPK27	 Metallic Bronze 3000K - cod. 97629MT00 2700K - cod. 97629MTK27
 Matt Red 3000K - cod. 97603OP00 2700K - cod. 97603OPK27	 Gun Metal 3000K - cod. 97632000 2700K - cod. 97632K270
 Matt Yellow 3000K - cod. 97605OP00 2700K - cod. 97605OPK27	

ALL RAL COATING AND GALVANIC FINISHES AVAILABLE UPON REQUEST

LIGHT EMISSION



Light source power: 3,22W	Efficacy 3000K: 64lm/W
Power absorption: 3,22W	Source Flux 2700K: 250lm@350mA
Light Emission: Diffuse	Emitted Flux 2700K: 201lm
Light Direction: Directional	Efficacy 2700K: 62lm/W
Light Source: Discrete LED	CCT: 2700/3000K
Source Flux 3000K: 260lm@350mA	CRI: 90
Emitted Flux 3000K: 207lm	Lifetime: >55000h

ELECTRICAL FACTS

Stand-by absorption: N/A
Mains Voltage: ----
Master output: ----
Ta max: 40°C

PACKAGING DATA


Box dimensions: 50x31x8 cm
Volume: 0,012 m³
Gross weight: 1,1 kg

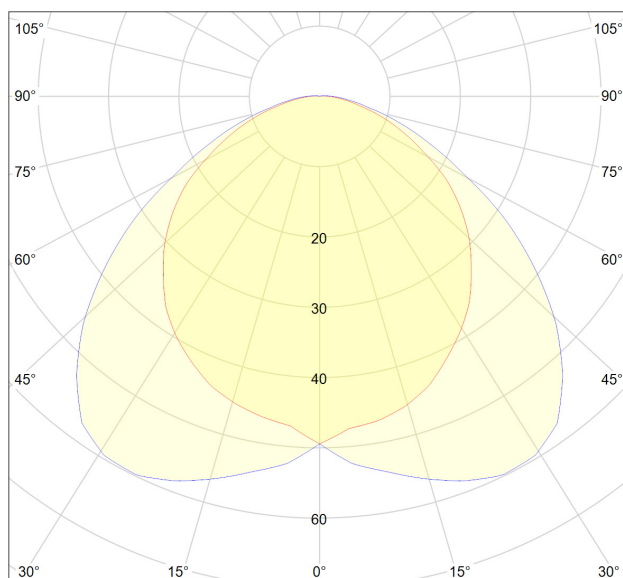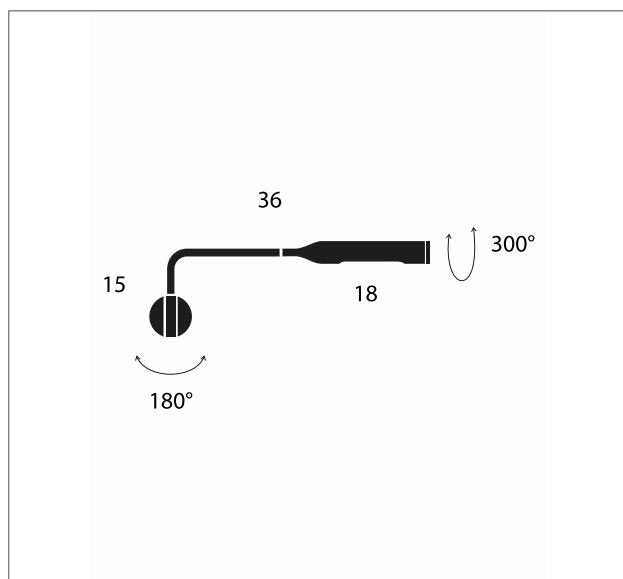

Flo Wall



Foster+Partners, 2013



Wall lamp with cable and plug in varnish coated aluminium and steel for diffused directional light. The head rotates 300° to direct the 3W-LED light and the arm swivells 180° on the wall bracket. 2-step push switch positioned on the head.

FINISHINGS

 Black Soft Touch 3000K - cod. 97501ST00 2700K - cod. 97501STK27	 Brushed Nickel 3000K - cod. 97544000 2700K - cod. 97544K27
 Matt White 3000K - cod. 975020P00 2700K - cod. 975020PK27	 Metallic Bronze 3000K - cod. 97529MT00 2700K - cod. 97529MTK27
 Matt Red 3000K - cod. 975030P00 2700K - cod. 975030PK27	 Gun Metal 3000K - cod. 97532000 2700K - cod. 97532K27
 Matt Yellow 3000K - cod. 975050P00 2700K - cod. 975050PK27	

ALL RAL COATING AND GALVANIC FINISHES AVAILABLE UPON REQUEST

LIGHT EMISSION

Light source power: 3,22W	Efficacy 3000K: 46lm/W
Power absorption: 4,5W	Source Flux 2700K: 250lm@350mA
Light Emission: Diffuse	Emitted Flux 2700K: 201lm
Light Direction: Directional	Efficacy 2700K: 45lm/W
Light Source: Discrete LED	CCT: 2700/3000K
Source Flux 3000K: 260lm@350mA	CRI: 90
Emitted Flux 3000K: 207lm	Lifetime: >55000h

ELECTRICAL FACTS

Stand-by absorption: <0.5
Mains Voltage: 100/240VAC
Master output: 24VDC; max 0.63A
Ta max: 40°C

PACKAGING DATA

Box dimensions: 50x31x8 cm
Volume: 0,012 m³
Gross weight: 1,15 kg

